

ENKELROOF-A 190 EEC (ENKRAEC190)

GENERAL DATA



ROOF FAN WITH ALUMINIUM COWL

MANUFACTURING FEATURES:

- Protection cowl made of anticorrosive treated aluminum easily removable for motor and impeller maintenance.
- Structure in anticorrosive galvanized steel and support frame for adaptation to the roof with anti-bird protection grid.
- High-efficiency backward-curved blade impeller with self-cleaning system.
 Reinforced polyamide impeller for models 155, 190 and 220. The rest of the models in aluminum.
- EC technology uses integral electronic control to ensure that the motor always runs at optimal load and ensures efficient energy utilization. It incorporates an external rotor EC motor with high efficiency and low noise level. Speed control through a 0-10V or PWM signal. 230V 50/60Hz single-phase power supply for models 155 to 310 and 400V 50/60Hz three-phase power supply for sizes 355 and 450. IP54 and motor class B insulation.

APPLICATIONS


Designed for deck or roof mounting, they are indicated for:

- Smoke extraction.
- · Air renewal in all types of buildings and industries.
- Working temperature range from -25°C to 60°C.

UNDER REQUEST

• Fan (size between 250 and 450) with k-factor reading.

PERFORMANCE CURVE

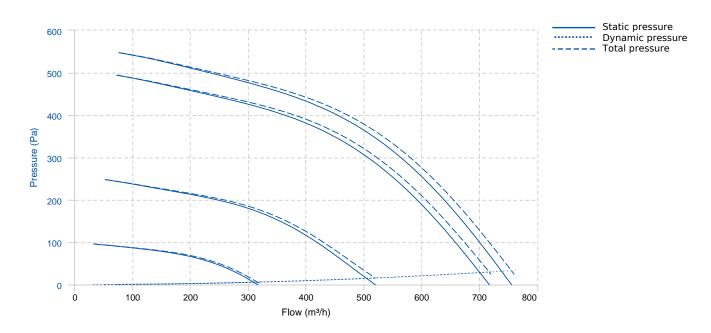








TECHNICAL DATA

Fan							
RPM	3570	Approx. weight	5 kg	Max. Flow	760 m³/h		
Motor							
Power	0.095 kW	RPM	3570	I max. (230V)	0,73 A	Approx. weight	2.6 kg

DIMENSIONS



Dimension	s (mm)							
А	435	В	341	С	86.5	D	206.5	

WIRING DIAGRAM

N°	Signal Señal	Colour Color	Specification Especificación
1	L	Brown Marrón	AC 220V/50Hz
2	N	Blue Azul	AC 220V/50Hz
3	Pe	Yellow-Green Amarillo-Verde	=

N°	Signal Señal	Colour Color	Specification Especificación
1	GND	Blue Azul	T
2	Vsp	Yellow Amarillo	0-10 V/PWM
3	Vcc	Red Rojo	DC 10V
4	FG	White Blanco	1 Pulse/R







ACCESSORIES



CONECTION FLANGE AC 175



REF: 960003205



SPEED CONTROLLER FOR EEC MOTOR REGC

REF: FX263300



CIRCULAR-CIRCULAR ANTI-VIBRATION FLANGE BAD 5 (Ø175)

REF: 960003455



SPEED CONTROLLER WITH SAFETY SWITCH FOR

EEC MOTOR PMR 25A REF: PMREEC



INCLINED ROOF FAN SUPPORT

BTI 310

REF: 50870310XX



ENKELROOF VERTICAL DISCHARGE KV ENKELROOF 150-190

REF: KVENKR190




CIRCULAR SOUND ATTENUATOR IN GALVANISED

STEEL

SILC-MINI 160 C REF: SILCM160C

SPARE PARTS

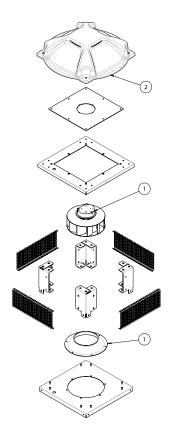







	Code	Model	Qt y
	241203017	MOTOR-FAN+INLET CONE Ø190 230V 50/60Hz	x1
-	279194478A	ROOF COWL ENKELROOF-A 155-190	x1



