

ENKELROOF-A 220 EEC (ENKRAEC220)

GENERAL DATA



ROOF FAN WITH ALUMINIUM COWL

MANUFACTURING FEATURES:

- Protection cowl made of anticorrosive treated aluminum easily removable for motor and impeller maintenance.
- Structure in anticorrosive galvanized steel and support frame for adaptation to the roof with anti-bird protection grid.
- High-efficiency backward-curved blade impeller with self-cleaning system.
 Reinforced polyamide impeller for models 155, 190 and 220. The rest of the models in aluminum.
- EC technology uses integral electronic control to ensure that the motor always runs at optimal load and ensures efficient energy utilization. It incorporates an external rotor EC motor with high efficiency and low noise level. Speed control through a 0-10V or PWM signal. 230V 50/60Hz single-phase power supply for models 155 to 310 and 400V 50/60Hz three-phase power supply for sizes 355 and 450. IP54 and motor class B insulation.

APPLICATIONS


Designed for deck or roof mounting, they are indicated for:

- Smoke extraction.
- · Air renewal in all types of buildings and industries.
- Working temperature range from -25°C to 60°C.

UNDER REQUEST

• Fan (size between 250 and 450) with k-factor reading.

PERFORMANCE CURVE

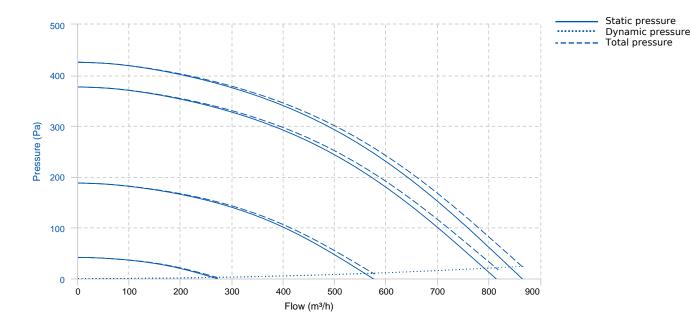






TECHNICAL DATA

Fan							
RPM	2600	Approx. weight	7 kg	Max. Flow	870 m³/h		
Motor							
Power	0.075 kW	RPM	2600	I max. (230V)	0,6 A	Approx. weight	1.4 kg

DIMENSIONS



Dimensions (mm)							
А	565	В	441	С	113.5	D	273,5	

WIRING DIAGRAM

N°	Signal Señal	Colour Color	Specification Especificación
1	L	Brown Marrón	AC 220V/50Hz
2	N	Blue Azul	AC 220V/50Hz
3	Pe	Yellow-Green Amarillo-Verde	=

N°	Signal Señal	Colour Color	Specification Especificación
1	GND	Blue Azul	T
2	Vsp	Yellow Amarillo	0-10 V/PWM
3	Vcc	Red Rojo	DC 10V
4	FG	White Blanco	1 Pulse/R







ACCESSORIES



CONECTION FLANGE AC 200





CIRCULAR-CIRCULAR ANTI-VIBRATION FLANGE BAD 6 (Ø200)

REF: 960003456



INCLINED ROOF FAN SUPPORT

BTI 410

REF: 50870410XX



SPEED CONTROLLER FOR EEC MOTOR

REGC

REF: FX263300



SPEED CONTROLLER WITH SAFETY SWITCH FOR

EEC MOTOR PMR 25A

REF: PMREEC



ENKELROOF VERTICAL DISCHARGE

KV ENKELROOF 220

REF: KVENKR220




CIRCULAR SOUND ATTENUATOR IN GALVANISED

STEEL

SILC-MINI 200 C REF: SILCM200C

SPARE PARTS

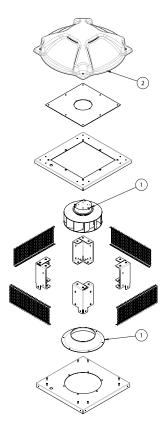







	Code	Model	Qt y
1	241253017	MOTOR-FAN+INLET CONE 220 220V 50-60Hz	x1
2	279254478A	ROOF COWL ENKELROOF-A 220-250	x1



