

# ENKELROOF-A 315 EEC (ENKRAEC310)

## GENERAL DATA

### ROOF FAN WITH ALUMINIUM COWL

#### MANUFACTURING FEATURES:



- Protection cowl made of anticorrosive treated aluminum easily removable for motor and impeller maintenance.
- Structure in anticorrosive galvanized steel and support frame for adaptation to the roof with anti-bird protection grid.
- High-efficiency backward-curved blade impeller with self-cleaning system. Reinforced polyamide impeller for models 155, 190 and 220. The rest of the models in aluminum.
- EC technology uses integral electronic control to ensure that the motor always runs at optimal load and ensures efficient energy utilization. It incorporates an external rotor EC motor with high efficiency and low noise level. Speed control through a 0-10V or PWM signal. 230V 50/60Hz single-phase power supply for models 155 to 310 and 400V 50/60Hz three-phase power supply for sizes 355 and 450. IP54 and motor class B insulation.

#### APPLICATIONS


Designed for deck or roof mounting, they are indicated for:

- Smoke extraction.
- Air renewal in all types of buildings and industries.
- Working temperature range from -25°C to 60°C.

#### UNDER REQUEST

- Fan (size between 250 and 450) with k-factor reading.

## PERFORMANCE CURVE

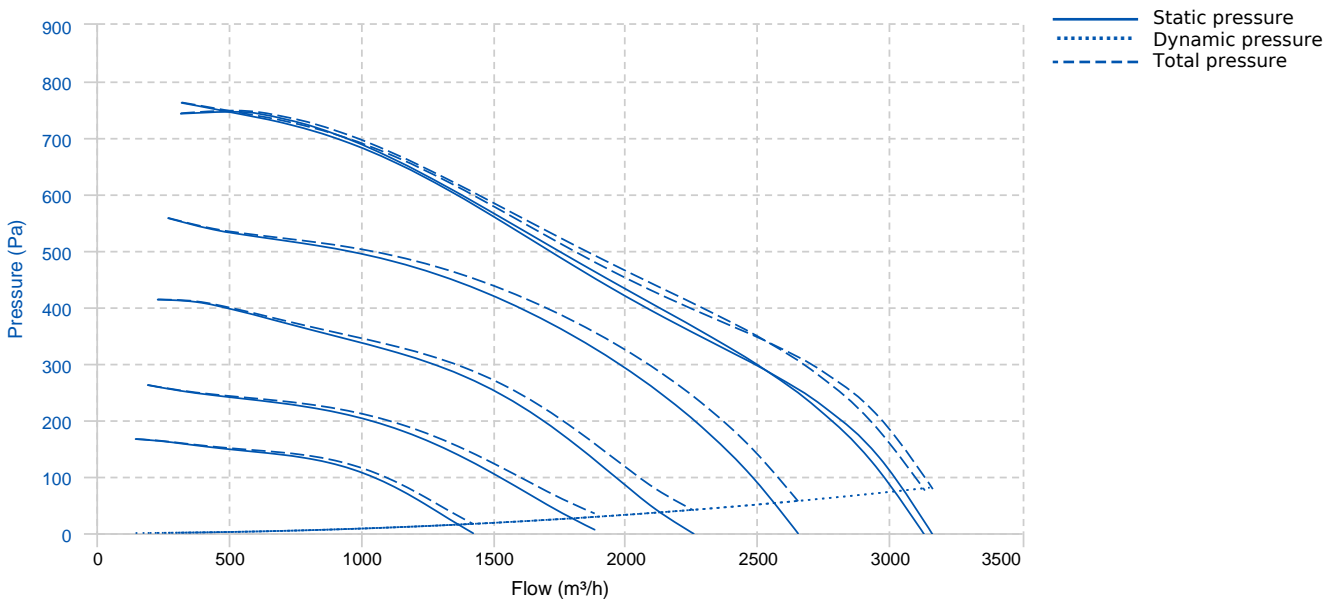

## TECHNICAL DATA


### Fan

RPM	2350	Approx. weight	16 kg	Max. Flow	3160 m <sup>3</sup> /h
-----	------	----------------	-------	-----------	------------------------

### Motor

Power	0.36 kW	RPM	2350	I max. (230V)	1,7 A	Approx. weight	5 kg
-------	---------	-----	------	---------------	-------	----------------	------


## DIMENSIONS

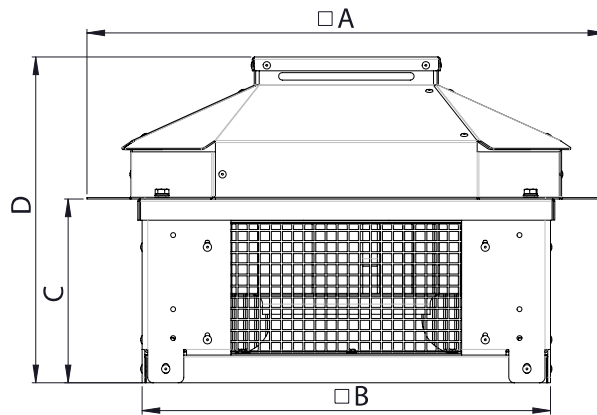


### Dimensions (mm)

A	765	B	601	C	194	D	559
---	-----	---	-----	---	-----	---	-----

## WIRING DIAGRAM

Nº	Signal Señal	Colour Color	Specification Especificación
1	L	Brown Marrón	AC 220V-50/60 Hz
2	N	Blue Azul	AC 220V-50/60 Hz
3	Pe	Yellow-Green Amarillo-Verde	

Nº	Signal Señal	Colour Color	Specification Especificación
1	GND	Blue Azul	
2	Vsp	Yellow Amarillo	0-10 V/PWM
3	Vcc	Red Rojo	DC 10V
4	FG	White Blanco	12 Pulse/R

## ACCESSORIES




**CIRCULAR-CIRCULAR ANTI-VIBRATION FLANGE  
BAD 9 (Ø300)**  
REF: 960003459




**CONNECTION FLANGE  
AC 300**  
REF: 960003209



**SPEED CONTROLLER WITH SAFETY SWITCH FOR  
EEC MOTOR  
PMR 25A**  
REF: PMREEC



**INCLINED ROOF FAN SUPPORT  
BTI 570**  
REF: 50870570XX



**DEPRESSION DUMPER (HORIZONTAL  
PLACEMENT)  
CMP-HHT 300x310**  
REF: CMPHHT3031




**ENKELROOF VERTICAL DISCHARGE  
KV ENKELROOF 315**  
REF: KVENKR315



**CIRCULAR SOUND ATTENUATOR IN GALVANISED  
STEEL  
SILC-MINI 315 C**  
REF: SILCM315C

## SPARE PARTS

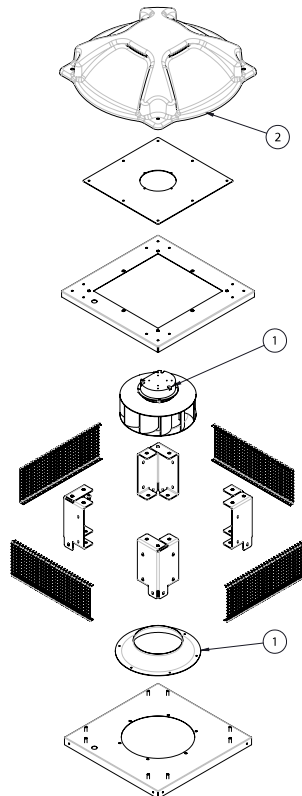

	Code	Model	Qty
1	241353017	MOTOR-FAN+INLET CONE Ø315 230V 50/60Hz	x1
2	279314478A	ROOF COWL ENKELROOF-A-KENTALROOF-A 315	x1