

DHUMAT 315 T2 1,1KW (245310182)

GENERAL DATA



SMOKE EXTRACTION BACKWARD CASING FAN 400°C/2h

MANUFACTURING FEATURES

CASING:

- Made of galvanized steel sheet with connection flanges and inspection door.
- Changeable panels.

MOTOR SUPPORT:

- Galvanised steel plate, motor with flanges fixed on 2 supports. Removable plate / support / impeller set.

IMPELLER:

- Backward centrifugal impeller, made of galvanised steel, dynamically balanced and self-cleaning.
- Direct drive on the motor shaft.

MOTOR:


- Three phase motor with IP-55 protection and F class insulation. Manufactured with standard voltages for one speed motors: 230/400V 50Hz up to 4 Kw and 400/690V 50Hz for higher powers of 4 and 6 poles. 2 speed motors: Dahlander 400V 50Hz

APPLICATIONS

- Smoke extraction in high buildings and establishments with people.
- Ventilation and smoke exhaust in covered parkings.
- Ventilation in technical, industrial or commercial facilities.
- Maximum continuous working temperature: carried air 110°C, environment 60°C.

Official homologation by the European laboratory APPLUS according to EN 12101-3:2015 Certification Nr: 0370-CPR-2861

PERFORMANCE CURVE

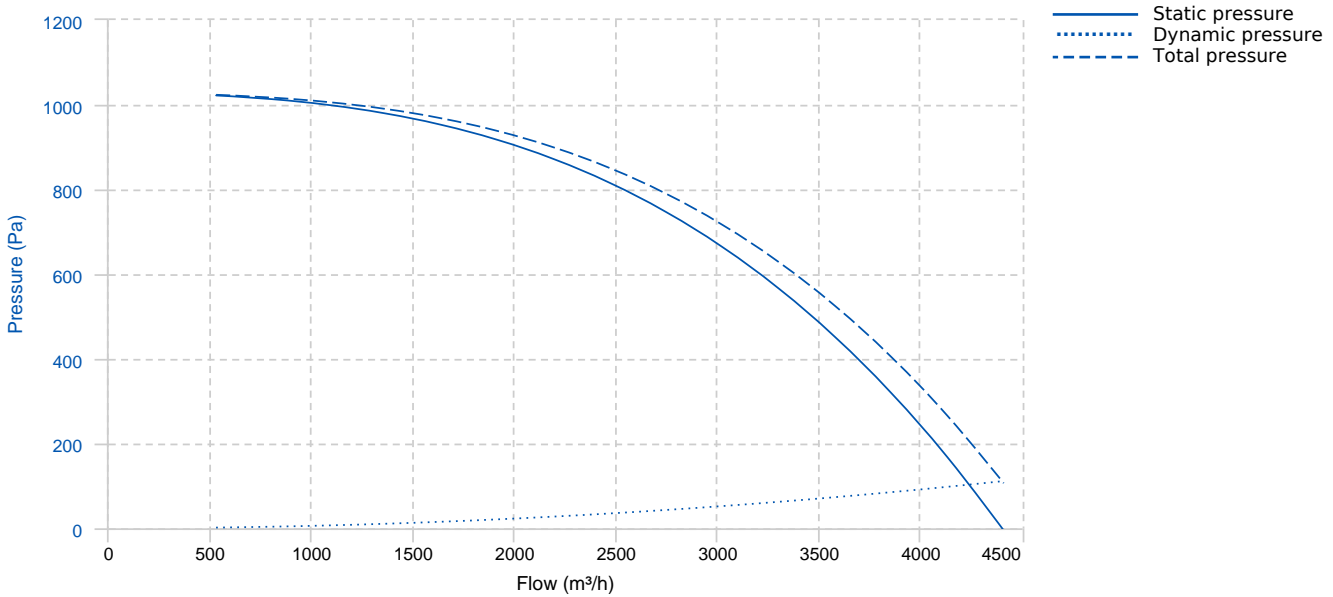


TECHNICAL DATA

Fan							
RPM	2800	Approx. weight	64 kg	Max. Flow	4410 m³/h		
Motor							
Power	1,1 kW	RPM	2800	I max. (230V)	4,05 A	I max. (400V)	2,33 A
Size	80	Approx. weight	16 kg	Efficiency (%)	82.7 %	FP	0.85

ERP DATA

Fan data sheet		
Fan type	Unit for non-residential ventilation (LOT 6)	
Typology	Unidirectional	
reports.other	None	
Type of driver	None	
Motor power (kW)	1.1	
	Fan values	ERP Requirements 2018
Max. efficiency (%)	54.02	42.62
Effic. Heat recovery (%)	-	
Pabs (kW)	1.105	
Flow (m³/h)	2708.64	
Static pressure (Pa)	756.62	
Speed (m/s)	8.38	

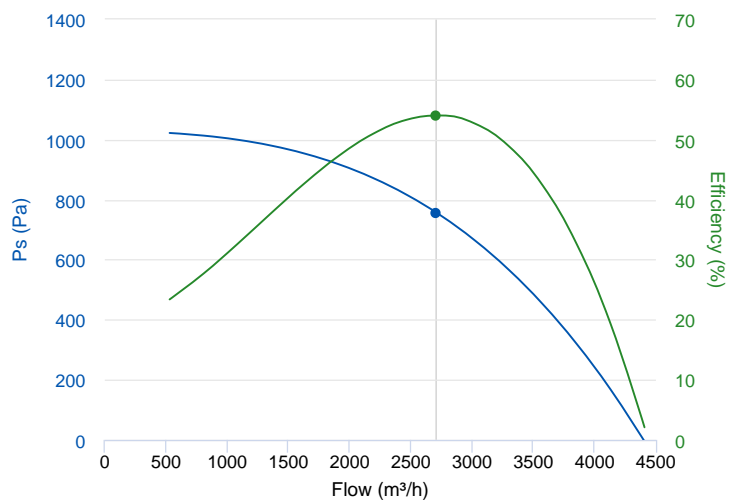




Fan values	ERP Requirements 2018
------------	-----------------------


SFP (W/m3/s)	1468.55
--------------	---------

DIMENSIONS

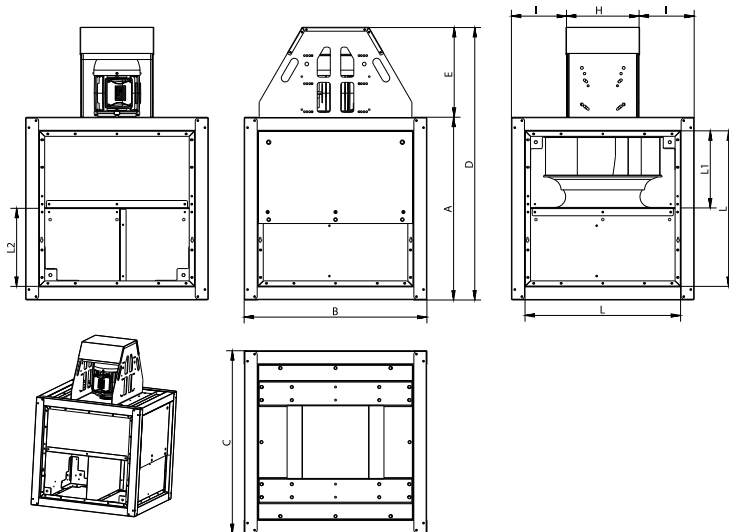

Dimensions (mm)									
A	600	B	600	C	600	D	912	E	312
H	278	I	161	K	26	L	495,7	L1	181,1
L2	313,1								

WIRING DIAGRAM

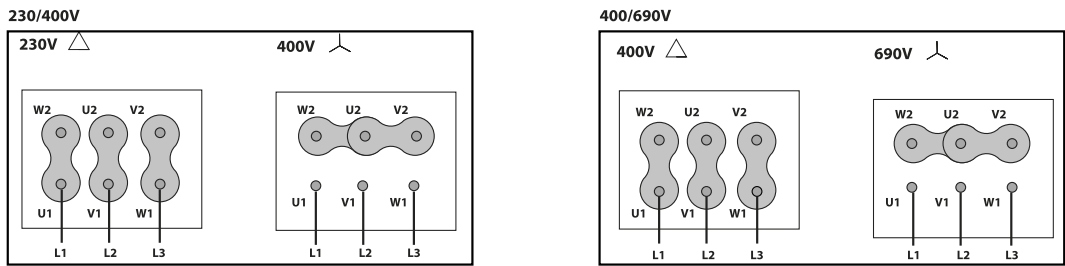

ACCESSORIES



SAFETY SWITCH
INT 25 3P A
REF: INT253PA



SAFETY SWITCH FOR 400°C/2h
INT 400 25A 3P
REF: 508902501



OUTLET FLANGE FOR DHUMAT
EI DHUMAT 315
REF: 965310111



DHUMAT FEET KIT
DKF 315-355
REF: 245319201



OUTDOOR FLANGE WITH BIRD GUARD FOR
DHUMAT
VIS DHUMAT 315-355
REF: 965310001



FREQUENCY SPEED CONTROLLER
SFC 230 I 4,2A *
REF: SFC230I004



FREQUENCY SPEED CONTROLLER
SFC 400 III 3,6A *
REF: SFC400III4




ANTI-VIBRATION RUBBER BLOCK
AVR (GENERIC)



ANTI-VIBRATION SPRING BLOCK
AVS (GENERIC)

SPARE PARTS

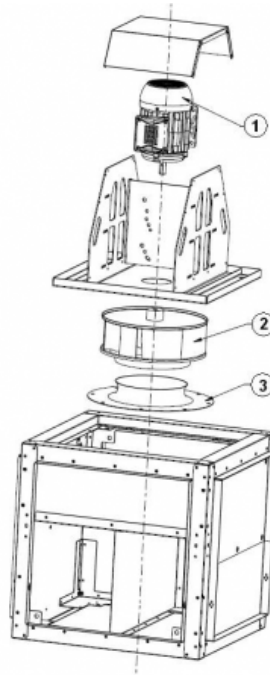

	Code	Model	Qty
1	721001043	MOTOR 1,1kW T2 B3 230/400V	x1

	Code	Model	Qty
2	CTB-N311-19LG	TURBINE NIMUS 315-1 D19 LG	x1
3	279311680	INLET CONE ED11 315	x1