

# HJBM 56 1,5kW EEC (1500rpm) (268561103)

### **GENERAL DATA**



WALL MOUNTED FAN WITH SQUARE FRAME, VARIABLE PITCH BLADES AND ELECTRONIC MOTOR

#### MANUFACTURING FEATURES

- Square plate made of galvanized steel sheet.
- Variable pitch angle polyamide impeller reinforced with fibreglass.
- Supplied with motor support and protection guard according to the ROHS 2002/95/EC Directive (Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipments).
- PM brushless motor (permanent magnets), synchronous, electronically commutated, high efficiency and low sound level. Specially designed for fans with electronic operation and control in deported box IP65.

Working range: from 400 to 1200-2000rpm (depending on the models) Motor with IP54 protection and class F insulation. IP 65 drive case

Power: 220V  $\pm$  10% single phase Power frequency: 50 / 60Hz

Operating temperature range: -20°C to 50°C Speed control through signal 0-10V or PWM

### **APPLICATIONS**


Designed for wall assembly, they are suitable for:

• Air renewal for all kind of buildings and industries.

#### **UNDER REQUEST**

- B form impeller (air flow from impeller to motor).
- Aluminium impeller.

### **PERFORMANCE CURVE**

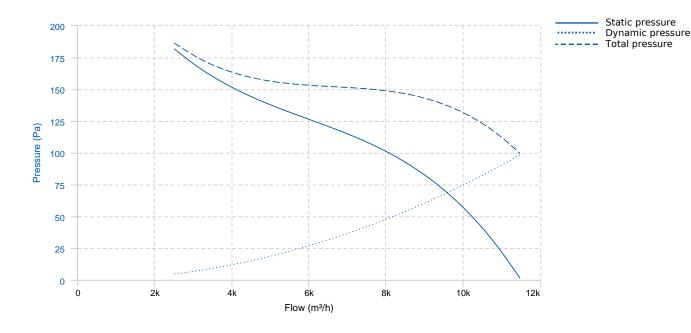



v9.8.0




## **TECHNICAL DATA**

Fan							
RPM	1500	Approx. weight	22 kg	Max. Flow	11480 m³/h		
Motor							
Power	1,5 kW	RPM	1500	I max. (230V)	10 A	Approx. weight	0 kg

## **ERP DATA**


Fan data sheet					
Fan type	Axial fan				
Installation category	A: Outlet and Inlet free discharge				
Efficiency category	Static				
The fan has to be installed with VF	No				
Motor power (kW)	1.5				
	Fan values	ERP Requirements 2015			
Max. efficiency (%)	41.75	32.08			
Efficiency grade (N)	49.67	40			
Pabs (kW)	0.56				
Flow (m³/h)	7158.42				
Static pressure (Pa)	112.91				
Speed (m/s)	1500				
Specific ratio	1.00				

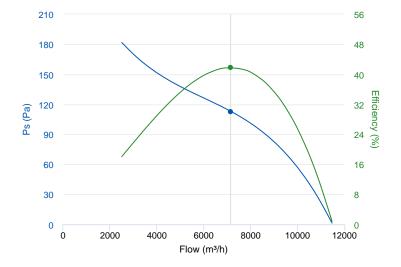






## **DIMENSIONS**

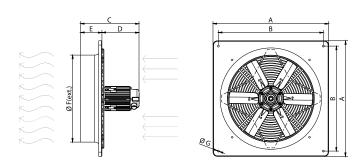

Dimensions (mm)									
А	725	В	650	С	290	D	170	Е	120
ØF	563	ØG	11						

## **WIRING DIAGRAM**

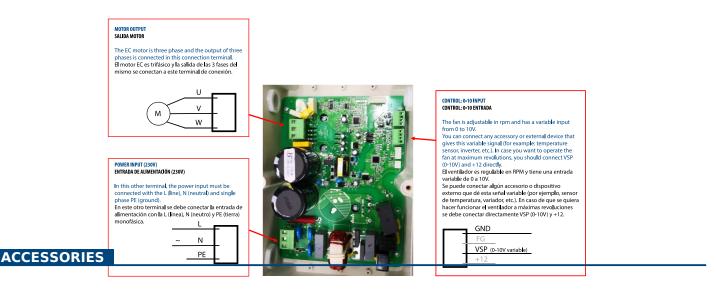



**SAFETY SWITCH** INT 25 3P A REF: INT253PA



Outlet protection guard for axial fans **RP0 56** REF: 980000056









## **PLASTIC GRAVITY SHUTTER PCP 56**

**REF:** 963250105




### **SPEED CONTROLLER FOR EEC MOTOR REGC**

**REF:** FX263300



**ALUMINIUM GRAVITY SHUTTER** PC2 60 **REF:** PC26060

## **SPARE PARTS**

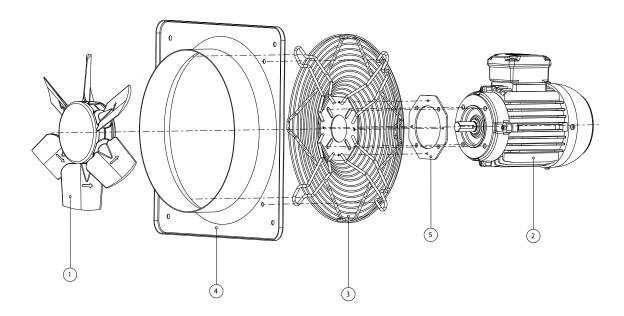

	Code	Model	Qt y
1	H56006440PSTD	IMPELLER 560:AP0:6 G40 D24	x1
3	268561906	PROTECTION GRID HJBM EEC56	x1

